





TRIANGLE

TRIANGLE

The TRIANGLE, as the name suggests, is a triangular planter. Thanks to its specific geometric triangle shape, it is very suitable for filling difficult spaces in the garden in various playful compositions. Or to very simply fill an internal corner.

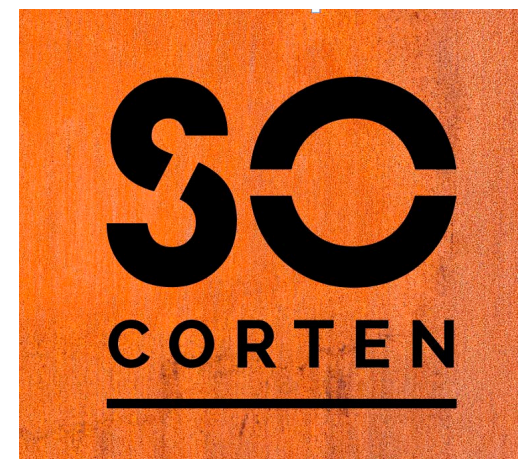

Material corten steel

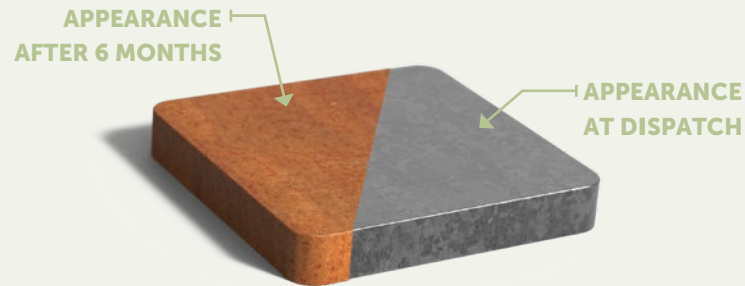

A new shape: characterised by the same angles as those of a geometric triangle. Our corten steel TRIANGLE has a warm appearance and can be beautifully combined with other corten steel elements in the garden. The TRIANGLE is for those looking for something just a little different!

The planter's warm appearance comes from its distinctive orange-brown patina, which is the result of a natural layer of rust. Another name for corten steel is weathering steel: weather conditions have a positive effect on this planter.

Corten steel is a metal alloy made by adding copper, phosphorus, silicon, nickel and chromium to iron. When exposed to air, the material forms a protective layer of rust. This natural coating prevents further corrosion so you can enjoy the TRIANGLE for many years.

SPECIFICATIONS

- 5-year warranty.
- Corten steel planters are very robust, hard-wearing, weatherproof, low-maintenance and durable.
- The planter has hidden feet (15 mm) and drainage holes, which allows it to float a little above the ground and provides optimal drainage.
- The corten steel has a standard thickness of 2 mm.
- The product can be customised.
- Products are delivered without rust. The corten steel weathering process takes about 4–5 months, depending on weather conditions.

KEY POINTS TO NOTE

- Products should be unpacked immediately upon receipt to release any moisture trapped inside the packaging. If the product is left in its packaging, it may develop uneven rust patches.
- Ensure proper drainage.
- Do not use an overflow pipe: no excess water should remain in the corten steel planter. This can cause the metal to corrode due to the interaction of oxygen and soil.
- Do not use hydro pellets: they retain moisture.
- We do not recommend using corten steel within 2 km of a coastline.
- The weathering process may cause rust run-off.
- The guarantee expires if you drill or grind in a way that is not specified.

Placement

1. It is important that the product is positioned on a firm, levelled surface. If the ground is not level, the weight of the planter will be unevenly distributed. This can cause stress damage.
2. Tie rods are fitted to the inside of some planters to provide essential structural stability and help them retain their shape. These should never be removed.
3. Always provide enough space around the planter (at least 1 cm) to prevent moisture from becoming trapped near its surface.

Planting advice

1. Cover the bottom of the planter with a layer of gravel (approx. 10 cm, Ø35 mm grading).
2. Place a permeable anti-root membrane over the gravel.
3. Cover the membrane with soil suitable for your chosen plants.
4. Do not use an overflow pipe: no excess water should remain in the corten steel planter. This can cause the metal to corrode due to the interaction of oxygen and soil.

Warning

- Be sure not to cover the drainage holes.
- Never use an overflow pipe in a corten steel planter.
- Never use Hydroponic pellets in a corten steel planter.

