

SAIDA with wheels

In this manual, we explain how to assemble wheels under our planters. This manual applies to all our SAIDA planters with wheels. We recommend following this manual.

NOTE!

- Maximum capacity is 450 kg per wheel. The planter is secure and can carry the weight of your plants. It is however important that you follow our planting advice at the bottom of the manual.
- Do not place trees in our planter with wheels. This may cause the planter to become too heavy and sag.
- Follow our planting advice.




**OPTION
CUSTOM MADE**



Install wheels

CORTEN STEEL

1. Wheels are supplied separately with the planter. Assembly is very easy, see image on the right.
2. Insert the bolt with washer on the inside of the planter through the hole in the square plate.
3. Slide the wheels over the bolts and then tighten them with the supplied nuts.

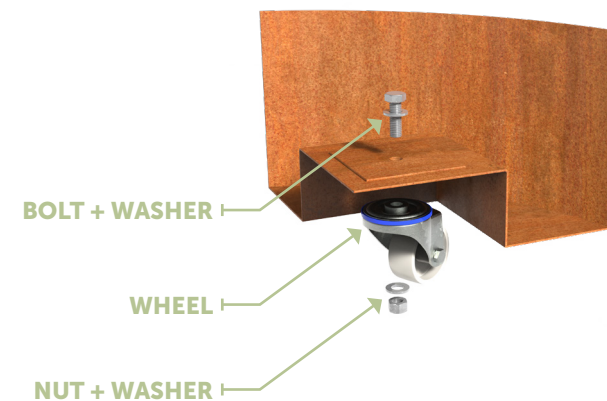

Installation

CORTEN STEEL

1. Provide a flat, solid surface. If not done carefully, it can create tension in the product which can result in damage to the product.
Note! Never use an overflow pipe with corten steel planters!
2. Always provide sufficient breathing space (minimum 1 cm) around the planters to prevent moisture trapping.



Planting advice

CORTEN STEEL

1. Cover the bottom of the planter with a layer of gravel (approx. 10 cm, Ø35 mm grading).
2. Place a permeable anti-root membrane over the gravel.
3. Cover the membrane with soil suitable for your chosen plants.
4. Do not use an overflow pipe; no water should remain in the corten steel planter.

